

PRODUCT INFORMATION

RPC Ltd produce a textured finish concrete paving to suit every requirement for pavements, including both commercial and domestic applications.

Saron Textured paving is manufactured from the finest Welsh aggregates that provide it with natural strength and durability.

It is both long lasting and elegant, with its signature being the subtle textured finish. Ideal for both contemporary and traditional paving projects.

Our hydraulically-pressed precast concrete units are strong and durable and manufactured to strict tolerances under BS EN1339:2003 Precast Concrete Flag.

PRODUCT SPECIFICATIONS


Product Type	Hydraulically pressed concrete flag with A textured finish
Manufactured and Tested to	BS EN 1339:2003
Bending Strength	Class 3 – characteristic bending strength of 6.0 MPa with no individual result less than 5.0 MPa
Abrasion Resistance (wide wheel test)	Class 4 - \leq 20mm (wide wheel abrasion test)
Polished Slip Resistance Value (USRV)	potential for slip – low (dry & wet)
Tolerance on Work Dimensions	Class 3 – thickness \pm 2mm; plan size \pm 2mm, max difference on diagonals 2mm on \leq 850mm & 4mm $>$ 850mm
Total Water Absorption	Class 2 - \leq 6.0 as a percentage by mass
Freeze/ Thaw Resistance	Class 3 - \leq 1.0 as a mean with no individual result value $>$ 1.5

STANDARD DIMENSIONS

Nominal size (mm)	Pack Size	Product Weight (kg/approx.)	Pack Weight (kg/approx.)	Code	Colour	Edge
300 x 300 x 50	80	11	880	SARONTG50	GY	Rounded
400 x 400 x 50	40	19	760	SARONTF50	GY	Rounded
450 x 450 x 50	40	24	960	SARONTE50	GY	Rounded
600 x 300 x 50	20	21	420	SARONTH50	GY	Rounded
600 x 450 x 50	20	31	620	SARONTA50	GY	Rounded
600 x 600 x 50	20	42	840	SARONTB50	GY	Rounded
750 x 600 x 50	20	53	1060	SARONTC50	GY	Rounded
900 x 300 x 50	20	32	640	SARONTK50	GY	Rounded
900 x 600 x 50	20	63	1260	SARONTD50	GY	Rounded

NATURAL colour: For example, the code for 600 x 300 x 50mm thick Saron Textured flag in Natural (GY) would be SARONTH50GY
Also available in nominal sizes of 63, 70 and above; fibre reinforced finish.

STANDARD COLOURS

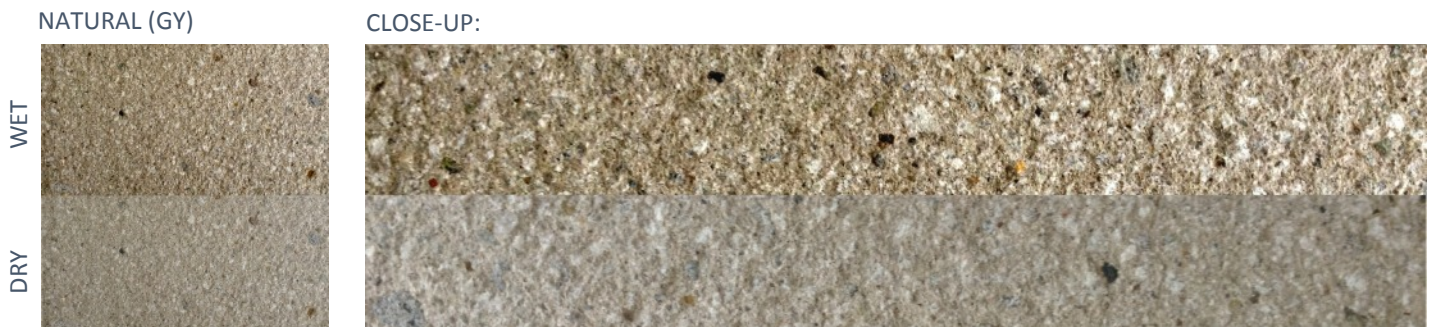

Please note that the actual product colour may slightly vary, therefore we always advice to view product samples prior ordering. Other finishes and sizes are available as a subject to consideration and lead times. For further assistance, please contact our Sales Office.