

## PRODUCT INFORMATION

RPC Ltd produce smooth ground concrete paving to suit every requirement for pavements, including both commercial and domestic applications.

Solo Supreme paving have excellent non-slip properties in both wet and dry conditions and come in various colours: Natural, Buff, Charcoal, Red and Brown.

Our hydraulically-pressed precast concrete units are strong and durable and manufactured to strict tolerances under BS EN1339:2003 Precast Concrete Flag.

## PRODUCT SPECIFICATIONS

|                                       |  |
|---------------------------------------|--|
| Product Type                          | Hydraulically pressed concrete flag with a ground smooth finish                                      |
| Manufactured and Tested to            | BS EN 1339:2003  |
| Bending Strength                      | Class 3 – characteristic bending strength of 6.0 MPa with no individual result less than 5.0 MPa     |
| Abrasion Resistance (wide wheel test) | Class 4 - < 20mm (wide wheel abrasion Test)  |
| Polished Slip Resistance Value (USRV) | potential for slip – low (dry & wet)   |
| Tolerance on Work Dimensions          | Class 3 – thickness ± 2mm; plan size ± 2mm, max difference on diagonals 2mm on < 850mm & 4mm > 850mm |
| Total Water Absorbion                 | Class 2 - < 6.0 as a percentage by mass  |
| Freeze/ Thaw Resistance               | Class 3 - < 1.0 as a mean with no individual result value > 1.5                                      |


## STANDARD DIMENSIONS

| Nominal size (mm) | Pack Size | Product Weight (kg/approx.) | Pack Weight (kg/approx.) | Code     | Colour         | Edge    |
|-------------------|-----------|-----------------------------|--------------------------|----------|----------------|---------|
| 400 x 400 x 50    | 40        | 19                          | 760                      | SOLOSF50 | BF/GY/CL/RD/BN | Rounded |
| 450 x 450 x 32    | 56        | 15                          | 840                      | SOLOSE32 | BF/GY/CL/RD/BN | Rounded |
| 450 x 450 x 50    | 40        | 24                          | 960                      | SOLOSE50 | BF/GY/CL/RD/BN | Rounded |
| 600 x 300 x 50    | 20        | 21                          | 420                      | SOLOSH50 | BF/GY/CL/RD/BN | Rounded |
| 600 x 600 x 35    | 26        | 30                          | 780                      | SOLOSB35 | BF/GY/CL/RD/BN | Rounded |
| 600 x 600 x 50    | 20        | 42                          | 840                      | SOLOSB50 | BF/GY/CL/RD/BN | Rounded |
| 900 x 600 x 50    | 20        | 63                          | 1260                     | SOLOSD50 | BF/GY/CL/RD/BN | Rounded |

BUFF/NATURAL/CHARCOAL/RED colour: For example, the code for 600 x 300 x 50mm thick Solo Supreme flag in Buff (BF) would be SOLOSH50BF

Also available in nominal sizes of 63, 70 and above; fibre reinforced finish.

## STANDARD COLOURS

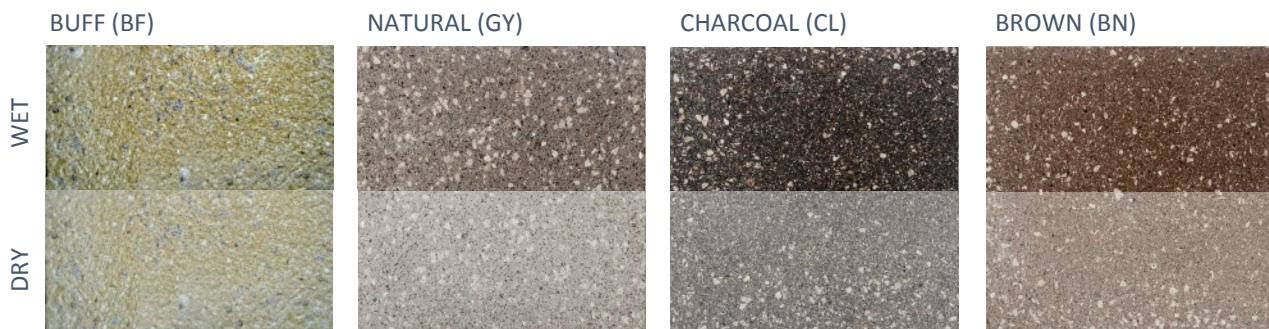

Please note that the actual product colour may slightly vary, therefore we always advice to view product samples prior ordering. Other colours and sizes are available as a subject to consideration and leading times. For further assistance, please contact our Sales Office.