

PRODUCT SPECIFICATIONS

Timbalok is a timber crib retaining wall system supplied by RPC Contracts Ltd.

Timbalok comprises a range of purpose designed interlocking timber components ensuring a cost effective form of construction as well as providing environmentally enhancing, aesthetically pleasing retaining wall solutions.

Timbalok is manufactured from stress-graded European timber from managed sustainable forests and is FSC certified, complementing RPC's own commitment to the environment.


Timbalok components are manufactured from kiln dried Baltic Redwood. Components are pressure-treated with Tanalith E3475 to BS 8417:2011 + A1: 2014 and has a desired service life of 60 years.

STANDARD DIMENSIONS & WEIGHTS

Unit (mm)	Type	Weight (kg)
600	Header	0.85
900	Header	1.28
1200	Header	1.60
2400	Stretcher	4.80

TIMBALOK DETAIL

HEADER UNIT

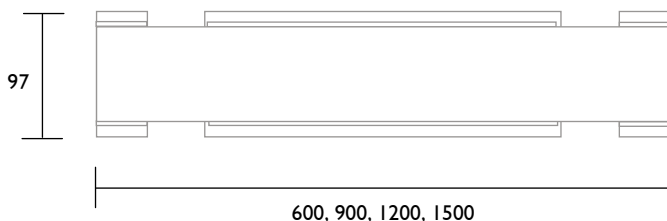

DELIVERY

Timbalok units are supplied palletised, facilitating off loading and site distribution.

Delivery is normally in 25 tonne loads on articulated lorries, and any local restrictions with regard to lorry size should be made known at the time of placing the order.

DIMENSIONAL TOLERANCES

Dimensional tolerances for the Timbalok components are based on the guidance given on BS EN 336. Any special requirements concerning dimensions should be made known by the Client at the pre-contract stage.



The Company's Policy is one of continuous development and product improvement. Information contained in this leaflet is subject to alteration without notice.