

PRODUCT INFORMATION

RPC Ltd produces a choice of tactile paving which is easily felt underfoot for pedestrian guidance.

The distinctive profiles indicate to the blind or partially-sighted the position of potential specific hazards on the footway or pavement.

The Tactile Paving range is specifically designed to meet The Department of the Environment, Transport and the Regions 'Guidance on the Use of Tactile Paving Surfaces'.

Our hydraulically-pressed pre-cast concrete units are strong and durable and manufactured to strict tolerances BS EN1339:2003

RPC operate a BS EN ISO 9001:2008 and BS EN ISO 14001:2008 Quality Management System.

PRODUCT SPECIFICATIONS


Product Type	Hydraulically pressed concrete flag with pimpled finish
Manufactured and Tested To:	BS EN 1339:2003
Bending Strength	Class 3 – characteristic bending strength of 6.7 Mpa (125x255), 4.2 Mpa (125x150) with no individual result less than 4.0 Mpa.
Abrasion Resistance (wide wheel test)	Class 4 - < 20mm (wide wheel abrasion test)
Unpolished Slip Resistance Value	potential for slip – extremely low (above 74)
Tolerance on Work Dimensions	Class 3 – thickness ±3mm; plan size ± 5mm, max difference on diagonals 2.5mm on < 850mm & 4mm > 850mm
Total Water Absorption	Class 2 - < 6.0 as a percentage by mass
Freeze/ Thaw Resistance	Class 2 - < 1.0 as a mean with no individual result value > 1.5

STANDARD DIMENSIONS

	Product Description (mm)	Product Weight (kg)	Quantity (per pack)	Pack Weight (kg)	Product Ordering Code			
					Buff	Red	Natural	Charcoal
BLISTER	400x400x50/65	19/24	36/28	677/684	TBPF50/65BF	TBPF50/65RD	TBPF50/65GY	TBPF50/65CL
	450x450x50/63/70	24/30/33	36/30/26	853/900/866	TBPE50/63/70BF	TBPE50/63/70RD	TBPE50/63/70GY	TBPE50/63/70CL
CYCLEWAY	400x400x50	19	36	677	TCPF50BF	TCPF50RD	TCPF50GY	TCPF50CL
DIRECTIONAL	400x400x50	19	36	677	TDPF50BF	TDPF50RD	TDPF50GY	TDPF50CL
HAZARD / CORDUROY	400x400x50/65	19/24	36/28	677/684	THPF50/65BF	THPF50/65RD	THPF50/65GY	THPF50/65CL
LOZENGE	400x400x50	19	36	677	TLPF50BF	TLPF50RD	TLPF50GY	TLPF50CL
PLATFORM	400x400x50	19	36	677	TPPF50BF	TPPF50RD	TPPF50GY	TPPF50CL
BARFACED	600x600x50/63	42/53	20/15	846/800	BARFB50/63BF	BARFB50/63RD	BARFB50/63GY	BARFB50/63CL
	900x600x50/63	63/80	20/15	1269/1199	BARFD50/63BF	BARFD50/63RD	BARFD50/63GY	BARFD50/63CL

Product code ordering example: CODE+desired SIZE+desired COLOUR (i.e. TBPE63BF for 63mm Blister tactile). Product code in **BOLD** - in stock, NORMAL - made to order.

TACTILE TYPES

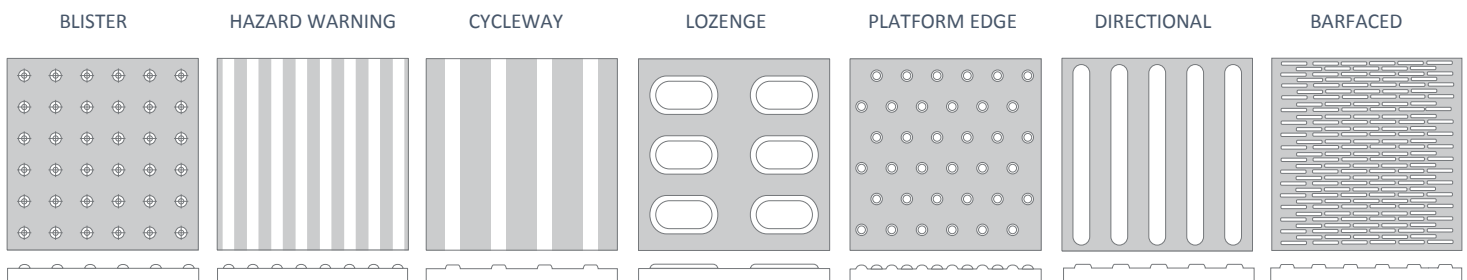

Please note that the actual product colour may slightly vary, therefore we always advice to view product samples prior ordering. Other finishes and sizes are available as a subject to consideration and lead times. For further assistance, please contact our Sales Office.