

PRODUCT INFORMATION

RPC Ltd produce kerbs, channels and fitments to suit every requirement of the Client.

Textured kerbs have excellent non-slip properties in both wet and dry conditions and come in various colours: Natural, Buff, Charcoal, Red and Brown.

Decorative kerbs are ideal for use in areas where more attractive kerbing is required. Solo Textured kerb provides the functionality that of a standard kerb with the added benefit of aesthetics.

Our hydraulically-pressed pre-cast concrete units are strong and durable and manufactured to strict tolerances of BS EN1340:2003 Concrete Kerb.

PRODUCT SPECIFICATIONS


Product Type	Hydraulically pressed concrete kerb with a textured finish
Manufactured and Tested to	BS EN 1340:2003
Bending Strength	Class 3 – characteristic bending strength of 6.7 MPa with no individual result less than 4.0 MPa
Abrasion Resistance (wide wheel test)	Class 4 - < 20mm (wide wheel abrasion test)
Polished Slip Resistance Value (USRV)	potential for slip – extremely low
Tolerance on Work Dimensions	Class 3 – thickness ± 3mm; plan size ± 5mm, max difference on diagonals 2.5mm on < 850mm & 4mm > 850mm
Total Water Absorption	Class 2 - ≤ 6.0 as a percentage by mass
Freeze/ Thaw Resistance	Class 2 - ≤ 1.0 as a mean with no individual result value > 1.5

STANDARD DIMENSIONS

Nominal size (mm)	Product Weight (kg/approx.)	Pack Size	Pack Weight (kg/approx.)	Product Code	Colour Code
HB1 Half Batter Kerb 150x300x914	97	14	1358	SOLOKHB1	GY/CH/BF/RD
HB2 Half Batter Kerb 125x255x914	69	16	1104	SOLOKHB2	GY/CH/BF/RD
HB3 Half Batter Kerb 125x150x914	40	16	640	SOLOKHB3	GY/CH/BF/RD
BN1 Bullnose Kerb 150x300x914	100	14	1400	SOLOKBN1	GY/CH/BF/RD
BN2 Bullnose Kerb 125x255x914	69	16	1104	SOLOKBN2	GY/CH/BF/RD
BN3 Bullnose Kerb 125x150x914	40	16	672	SOLOKBN3	GY/CH/BF/RD
SP2 Splay Kerb 125x255x914	65	16	1040	SOLOKSP	GY/CH/BF/RD

BUFF/NATURAL/CHARCOAL/RED colour: for different colours, add **Colour Code** to the end of the **Product Code** (i.e. code for Solo HB2 half batter kerb in buff would be **SOLOKHB2BF**)
Also available in fibre reinforced finish and different radii (please contact our Sales Office for further detail).
Different colours are subject to manufacture and may be available as special order, only.

STANDARD COLOURS

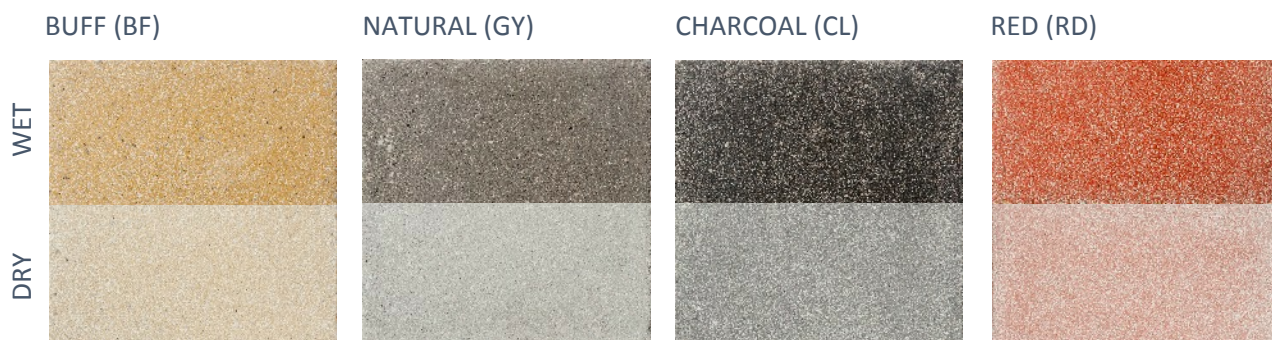

Please note that the actual product colour may slightly vary, therefore we always advice to view product samples prior ordering. Other colours and sizes are available as a subject to consideration and lead times. For further assistance, please contact our Sales Office.